



NOTES:

1. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION PARAMETERS (DIMENSIONS, LOCATIONS) AND WASTE AND SUPPLY REQUIREMENTS OTHER THAN SHOWN.
2. FLOW ADJUSTMENT: REMOVE HEX NUT AND BUTTON. ADJUST FLOW WITH SCREWDRIVER; CLOCKWISE FOR MORE FLOW, COUNTERCLOCKWISE FOR LESS. IF DESIRED FLOW IS NOT OBTAINED, MAKE SURE SCREWDRIVER STOP IS FULLY OPEN. REINSTALL BUTTON AND HEX NUT.

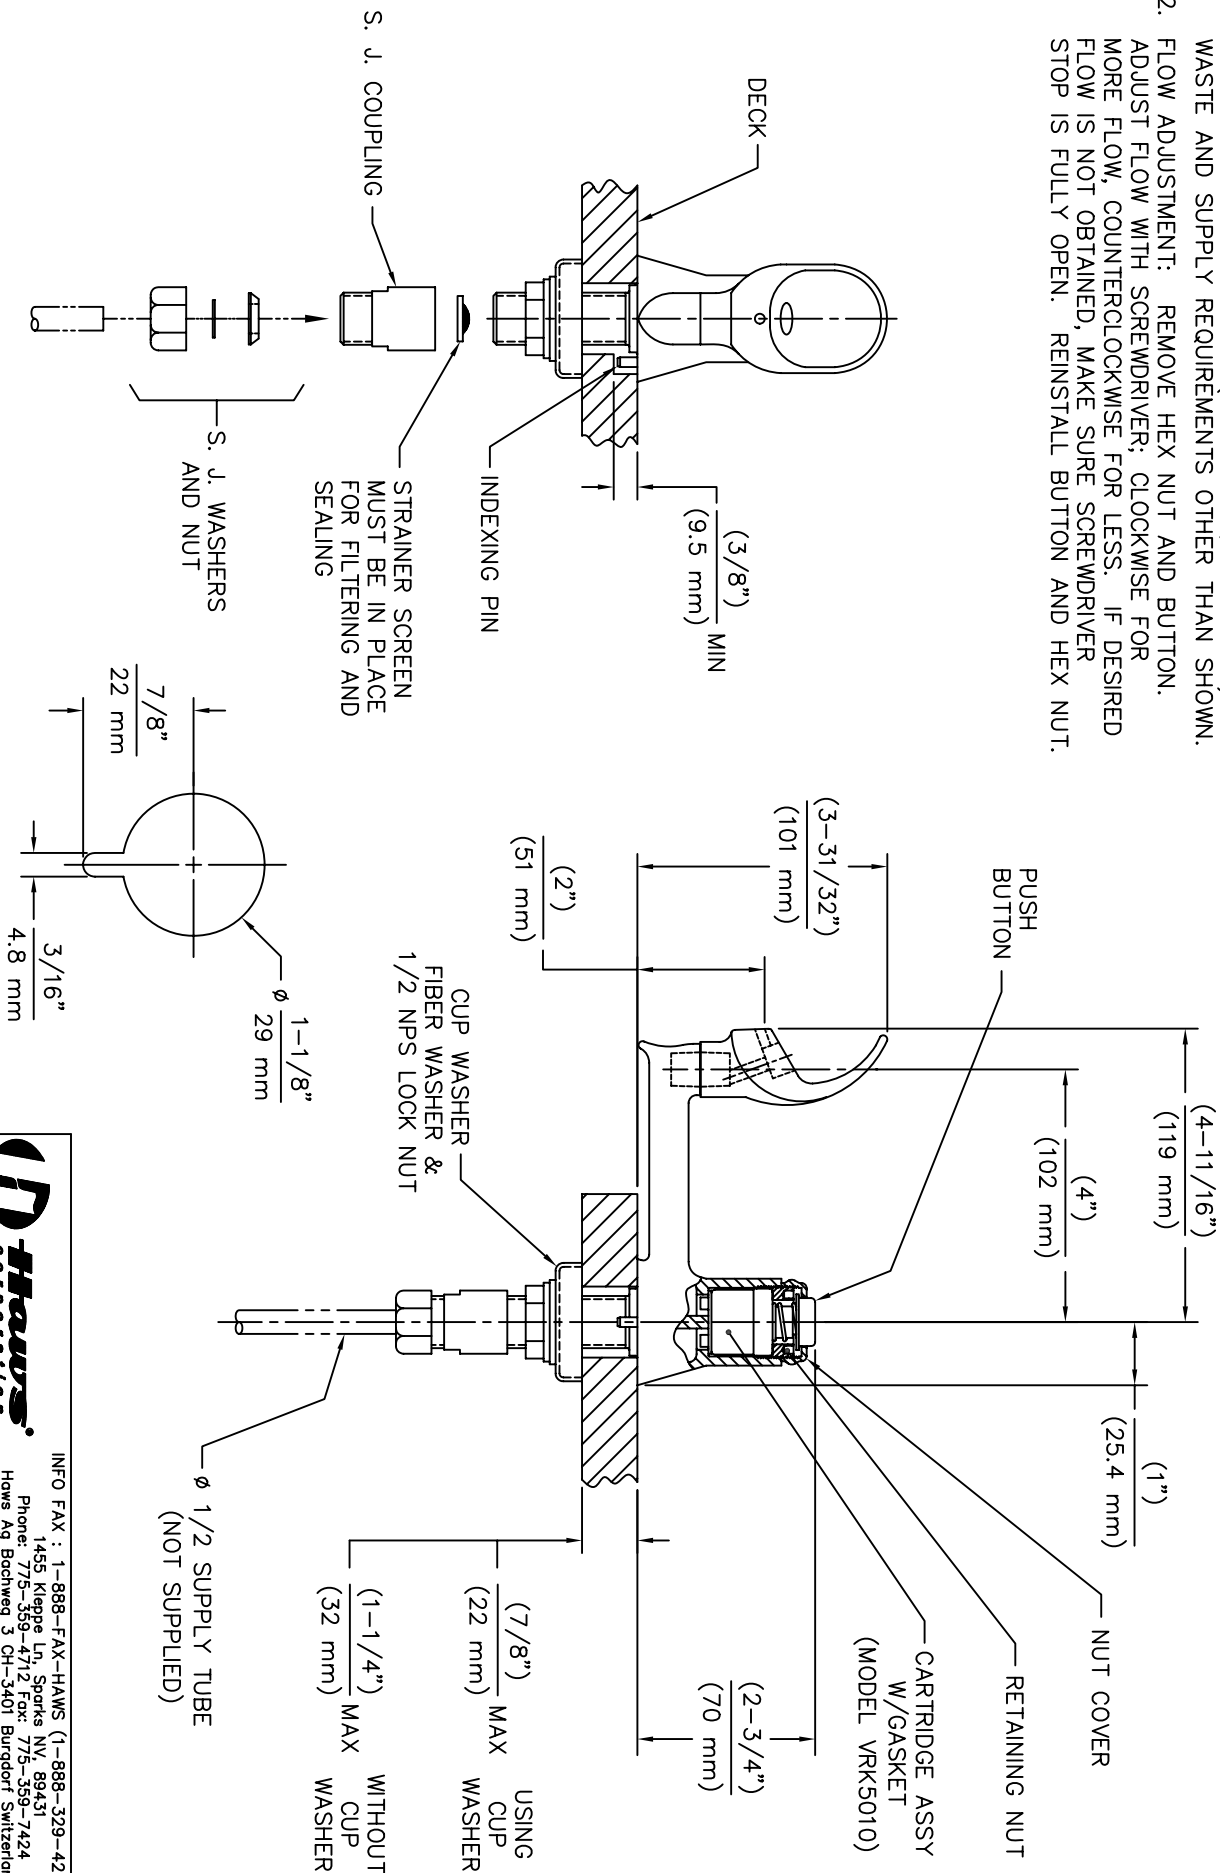

MOUNTING HOLE

SCALE: 2/1



INFO FAX : 1-888-FAX-HAWS (1-888-329-4297)

1455 Kleppe Ln, Sparks, NV, 89431

Phone: 775-355-7712, Fax: 775-355-7424

Haws AG, Bockweg 3, CH-3401, Burgdorf, Switzerland

Haws Wfg Pte Ltd 74 Sungei Kodut Loop Singapore 729531

e-mail: haws@hawsco.com website: www.hawsco.com

MODEL(S): 5017LF

INFO FAX DOC # 250173

SCALE: 1:3 DRAWING TYPE: INSTALLATION/FABRACK

DESIGN NO.	REVISION	DATE	BY	CHK'D	DATE
5017LF	07/99	07/99			
14148C00	1	1	1	1	1