

Job Name/Title: _____ Catalog Number _____
Contractor: _____ Notes: _____

LED Linear Lighting

4 Ft Ballast Bypass LED Retrofit Frosted T8

Features


- Bypass double-end connection minimizes labor and eliminates need for additional non-shunted sockets
- Extremely long life and energy efficient
- Alternate to install as single-end bypass*
- Easy and safe replacement for fluorescent T8 systems
- Glass tube with PET coating for shatter protection, NSF-2

Specs

- 120-277V
- Input current 0.2 Amps
- PF <0.9, THD <20%
- 83 CRI
- 50,000 Functional rated life
- LED SMD 2835, Qty 72
- 160° Beam angle, 240° Light emitting area
- -20°C to 40°C Ambient temperature
- Not dimmable

Applications

- Office, retail, hospitality, warehouse
- High lumen version suitable for high bay T8 replacement

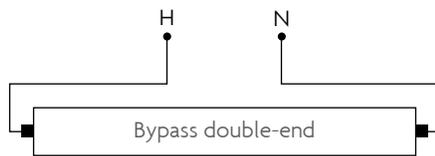

Catalog Number	Product Code	UPC Code	Color Temp	Watts	Lumens	LPW	Case Qty	DLC ID
L4T8B/835/15F/DE-70	74260	751338024557	3500K	15	1,900	127	1/12	PLGBQBC3E2NM
L4T8B/840/15F/DE-70	74261	751338024502	4000K	15	2,000	133	1/12	PL7JNKS4IQHL
L4T8B/850/15F/DE-70	74262	751338024519	5000K	15	2,000	133	1/12	PLBZJLGBQ1S
L4T8B/840/18F/DE-70	74263	751338024526	4000K	18	2,400	133	1/12	PL3TKHHILRAO
L4T8B/850/18F/DE-70	74264	751338024540	5000K	18	2,400	133	1/12	PL02Z6GKBHVO

Specifications are subject to change without prior notice.
*Requires non-shunted lampholder for single end operation

