

SUPERSEDES: November 26, 2013

EFFECTIVE: December 1, 2014


JOB _____ ENGINEER _____ CONTRACTOR _____ REP. _____

ITEM NO.	LOCATION	MODEL NO.	QUANTITY	PRE-CHARGE *	WORKING PRESSURE **

* Unless otherwise specified, standard pre-charge of 40 psi (276 kPa).

SPECIFICATIONS

- Designed and constructed per ASME Code Section VIII, Div. 1.
- Construction: Carbon Steel with exterior red oxide primer finish
- Standard Design Pressure and Temperature: 150 psi @ 240°F (136 kPa @ 116°C) Max.
- Registered with the National Board of Pressure Vessel Manufacturers
- U-1A Data Report
- Bladder type for permanent separation of air and water.
- Water expands into bladder, air pre-charge on shell side.
- Bladder – Heavy Duty Butyl, removable for inspection.
- System Connection Materials 304 Stainless Steel
- **Suitable for Vertical or Horizontal Installation**
- **Optional Design Pressures and Temperatures**
 - 150 psi @ 280°F (1034 kPa @ 138°C)
 - 175 psi @ 240°F (1207 kPa @ 116°C)
 - 175 psi @ 280°F (1207 kPa @ 138°C)
- **Additional Options**
 - [A] Anchor Clips
 - [B] Bulls Eye Sight Glass

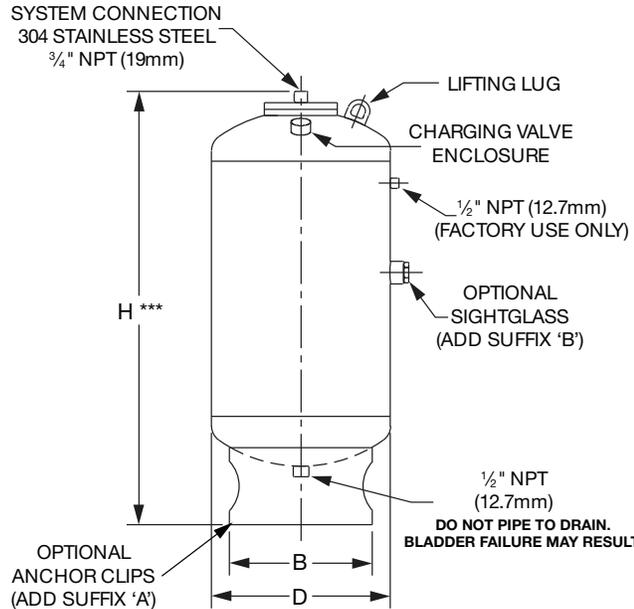

MODEL NUMBER	TANK VOLUME		ACCEPTANCE VOLUME		H HEIGHT ***		B DIAMETER		D DIAMETER		SHIPPING WEIGHT **		SYSTEM CONNECTION SIZE	
	GAL.	liter	GAL.	liter	INCH	mm	INCH	mm	INCH	mm	LBS.	kg	Imperial	metric
PAX30-150	8	30	5	19	24 ³ / ₄	629	12	305	14	356	90	41	3/4" NPT	19 mm
PAX42-150	11	42	5	19	29 ³ / ₄	756	12	305	14	356	105	48	3/4" NPT	19 mm
PAX84-150	22	83	12	45	41 ¹ / ₄	1048	12	305	16	406	150	68	3/4" NPT	19 mm
PAX130-150	34	129	19	72	52 ¹ / ₂	1334	12	305	16	406	200	91	3/4" NPT	19 mm
PAX170-150	45	170	24	91	65 ³ / ₄	1670	12	305	16	406	240	109	3/4" NPT	19 mm
PAX215-150	57	216	31	117	57 ⁷ / ₈	1470	16	406	20	508	250	113	3/4" NPT	19 mm
PAX254-150	67	254	34	129	67 ¹ / ₄	1708	16	406	20	508	280	127	3/4" NPT	19 mm
PAX300-150	79	299	43	163	56 ¹ / ₂	1435	20	508	24	610	300	136	3/4" NPT	19 mm
PAX350-150	92	348	43	163	63 ⁵ / ₈	1616	20	508	24	610	330	150	3/4" NPT	19 mm
PAX425-150	112	424	61	231	76 ³ / ₈	1940	20	508	24	610	380	172	3/4" NPT	19 mm
PAX500-150	132	500	61	231	84 ⁷ / ₈	2156	20	508	24	610	425	193	3/4" NPT	19 mm

** Weight shown is for 150 psi models only. Consult factory for shipping weight of higher design pressure models.**

*** Allow 18" minimum clearance above tank for piping system connection.

COMMENTS: _____