




BLU 60 mm (6" × 13")

DESCRIPTION: Slab **TEXTURE:** Smooth and HD² Smooth

Pallet Overview



Specifications per pallet




198 units / pallet

	Imperial	Metric
Product dimension (L × W × H)	6 ½ × 13 × 2 ¾	165 × 330 × 60
Cubing	116.05 ft²	10.78 m²
Approx. Weight Smooth	3 138 lbs	1 423 kg
Approx. Weight HD² Smooth	3 147 lbs	1 427 kg
Number of rows	11	
Coverage per row	10.55 ft²	0.98 m²
Lin. coverage per row	Depth 19.5 lin. ft	5.94 lin. m
	Length 9.75 lin. ft	2.97 lin. m



Laying Patterns Options

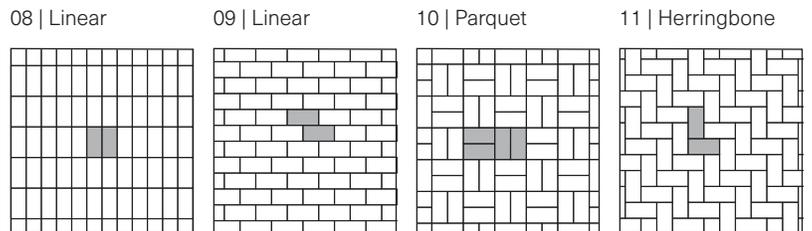

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

NOTES

See page 6 for icons description.
 See page 16 for more information about applications.
 See page 26 to 28 for more technical information. When used in a permeable pavement application, see page 93 to 102 for more technical information.

JOINT WIDTH: ½" (7 mm)
% OF SURFACE OPENING: 4.8%
INFILTRATION RATE: 570 in./hr (14 475 mm/hr)
 *For this application, it is recommended that this product be installed on a concrete base as designed by a local Engineer.