



CARBON STEEL CHEMICAL BYPASS FEEDERS

By-Pass Feeders are a convenient method of introducing treatment chemicals into closed circulating water systems.

By-Pass Feeders are ideal for use in hot water treatment in heating systems or chill water air conditioning systems.

Industrial gray enamel finish paint.

FLAT BOTTOM FEEDERS

FB-200 SERIES

Model Number	Capacity (Gals)	A Inches	B Diameter	C Inches	D Inches	1 Inches	2 Inches	3 Inches	4 Inches	Weight (Lbs)
FB1-200V	1.0	17.20	6.0	2.60	18.0	0.75	0.75	NA	NA	16
FB2-200V	2.0	25.20	6.0	2.60	26.0	0.75	0.75	NA	NA	18
FB2-200Q	2.0	21.12	6.0	3.25	12.5	NA	NA	0.75	0.75	19
FB5-200V	5.0	23.40	10.0	2.40	24.0	0.75	0.75	NA	NA	32
FB5-200Q	5.0	21.10	10.0	4.25	10.6	NA	NA	0.75	0.75	33
FB10-200V	10.0	38.40	10.0	2.40	39.0	0.75	0.75	NA	NA	49
FB12-200Q	12.0	41.25	10.0	4.12	31.0	NA	NA	0.75	0.75	58
FB15-200Q	15.0	38.40	10.0	2.40	54.0	NA	NA	0.75	0.75	66
FB18-200Q	18.0	60.62	10.0	2.40	44.0	NA	NA	0.75	0.75	82

DOME BOTTOM FEEDERS

DB-200 SERIES

Model Number	Capacity (Gals)	A Inches	B Diameter	C Inches	D Inches	E Inches	F (B.C.) Inches	G Inches	1 THRU 6 Inches	Weight (Lbs)
DB1-200V	1.0	24.80	6.0	10.30	25.00	6.00	7.50	0.375	0.75	17
DB2-200V	2.0	32.80	6.0	10.30	33.00	6.00	7.50	0.375	0.75	22
DB2-200Q	2.0	30.75	6.0	8.75	13.12	8.75	4.00	0.375	0.75	23
DB5-200V	5.0	30.80	10.0	9.70	31.00	4.90	11.50	0.375	0.75	36
DB5-200Q	5.0	30.50	10.0	13.63	7.75	10.00	8.00	0.375	0.75	37
DB10-200V	10.0	45.80	10.0	9.70	46.00	4.90	12.00	0.375	0.75	53
DB12-200Q	12.0	51.25	10.0	5.78	7.75	10.00	8.00	0.375	0.75	62
DB15-200Q	15.0	45.80	10.0	9.70	61.00	4.90	8.00	0.375	0.75	53
DB18-200Q	15.0	45.80	10.0	9.70	61.00	4.90	8.00	0.375	0.75	86

B.C. = Bolt Circle V = Victaulic Q = Quick Closure



ACCESSORIES

Model Number	DESCRIPTION	Weight (Lbs)
VC-003	Victaulic Closure cap, gasket, and center plate with tap replacement	3
QCC	Quick closure cap only - replacement	2
PF-020	Pleated Filter 20 Micron	1
PFWH-020	Pleated Filter 20 Micron With Hanger Assembly	5
SFI-075	3/4" In-line bronze sight flow w/tempered glass viewing window & ABS plastic impeller	1
SF-125	Sock filter with hanger assembly	5
FF-006-2011	6" HIGH FILL FUNNEL WITH 3/4" MNPT CONNECTION (.25 LITER)	6.5
FF-010-2011	10" HIGH FILL FUNNEL WITH 3/4" MNPT CONNECTION (.68 LITER)	8
25-BV	* 1/4" nickel plated ball valve with victaulic unit only *	0.3

NOTE: INLET/OUTLET FITTINGS ARE 3/4" NPT
Weight and dimensions are approximate.

Flat Bottom Max. Working Pressure: 200 psi
Dome Bottom Max. Working Pressure: 200 psi
Max Working Temperature: 375°F
All dimensions are +/- 1/8" and weights are approximate.

Victaulic Cap Units

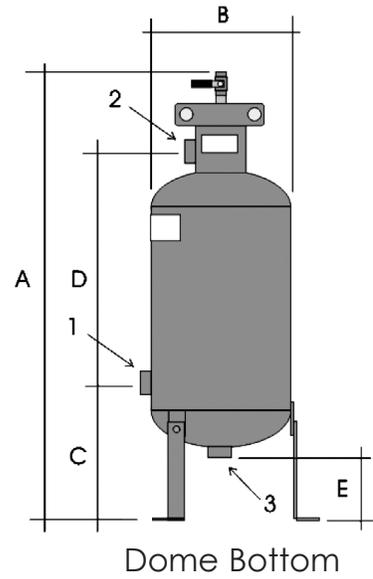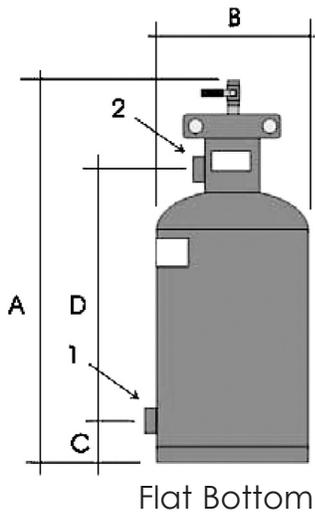

Quick Closure Units

