

CAMBRIDGE™ 5' BATHING POOL

Bathing Pool:

- ☐ 2461.002 Bathing Pool Right Hand Drain Outlet
- ☐ 2460.002 Bathing Pool Left Hand Drain Outlet

- Americast® brand engineered material
- Acid-resistant porcelain finish
- Integral apron with integral 3-sided tile/water retention flange
- Integral lumbar support with beveled headrest
- Full slip-resistant coverage

Nominal Dimensions:

1524 x 813 x 451 mm
(60" x 32" x 17-3/4")

Bathing Well Dimensions:

1372 x 660 x 432 mm
(54" x 26" x 17")



SEE REVERSE FOR PRODUCT DIMENSIONS
AND SPECIFICATIONS

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.4M for Americast Fixtures
- ASTM F-462 for Slip-resistant Bathing Facilities
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.


Americast® brand engineered material is a composition of porcelain bonded to enameling grade metal, bonded to a patented structural composite.

To Be Specified - Required:

- ☐ Color:
- ☐ Bath Filler: (specify finish)
- ☐ Bath Drain: 1583.470 (specify finish)



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES
AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND
USEABLE BUILDING FACILITIES-CHECK LOCAL CODES.
INSTALL WITH SEAT AT HEAD END.

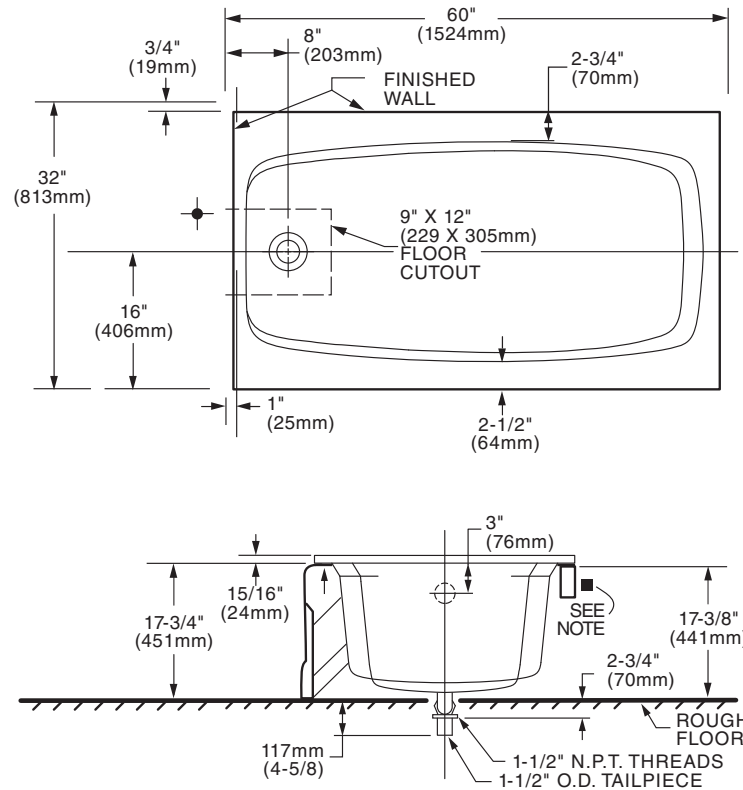

GENERAL SPECIFICATIONS FOR 2460/2461 BATHING POOL

INSTALLED SIZE	60 x 32 x 17-3/4 In. (1524 x 813 x 451mm)
WEIGHT	118 Lbs. (54 Kg.)
WEIGHT w/WATER	535 Lbs. (242 Kg.)
GAL. TO OVERFLOW	50 Gal. (190 L)
BATHING WELL AT SUMP	41 x 20 In. (1041 x 508mm)
BATHING WELL AT RIM	54 x 26 In. (1372 x 660mm)
WATER DEPTH TO OVERFLOW	14 In. (336mm)
FLOOR LOADING (PROJECTED AREA)	39 Lbs./Sq.Ft. (191 Kgs./Sq.m)
PTS.	13.9
CUBE (FT ³)	30.9

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.4. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.

NOTES:

- REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATHING POOL FOR ADDITIONAL INFORMATION.
- SHOWN WITH 8620. SERIES AMARILIS BATH/SHOWER FITTING AND POP-UP C.D. & O.
- LEFT HAND OUTLET SHOWN, RIGHT HAND REVERSE DIMENSIONS (2461).
- CONCEALED PIPING NOT FURNISHED.
- FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
- PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.