




BLU 60 mm (6" x 13")

DESCRIPTION: Slab TEXTURE: Slate and HD² Slate




| Specifications per pallet | | Imperial | Metric |
|---|--------------------------------------|---|----------------------------|
|  198 units / pallet | Product dimension (L x W x H) | 6 ½ x 13 x 2 ¾ | 165 x 330 x 60 |
| | Cubing | 116.05 ft ² | 10.78 m ² |
| | Approx. Weight Slate | 3 138 lbs | 1 423 kg |
| | Approx. Weight HD ² Slate | 3 183 lbs | 1 444 kg |
| | Number of rows | 11 | |
| | Coverage per row | 10.55 ft ² | 0.98 m ² |
| | Lin. coverage per row | Depth 19.5 lin. ft Length 9.75 lin. ft | 5.94 lin. m 2.97 lin. m |


Pallet Overview



Laying Patterns Options

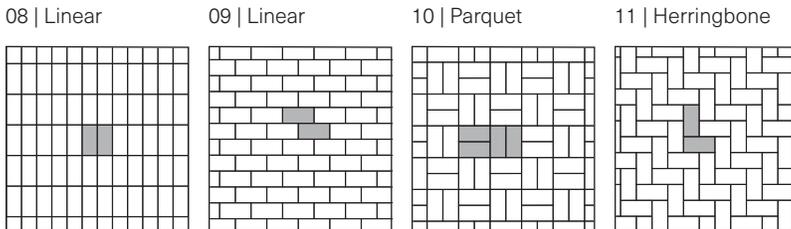

Patterns are for design inspiration only. The installer is responsible to calculate & purchase the correct amount of material.

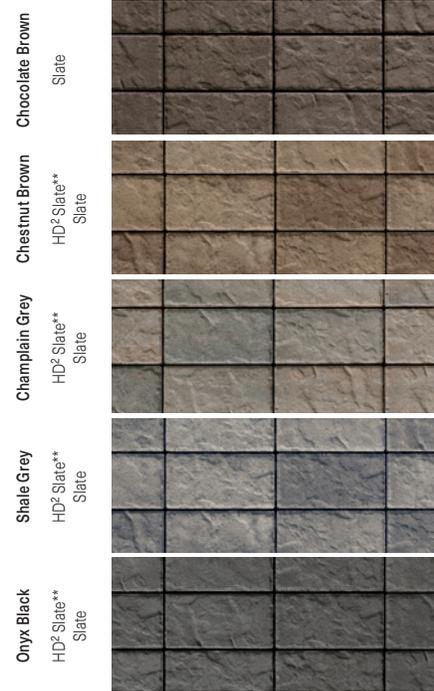

NOTES

See page 6 for icons description.

See page 16 for more information about applications.

See page 26 to 28 for more technical information. When used in a permeable pavement application, see page 93 to 102 for more technical information.

JOINT WIDTH: ⅜" (7 mm)
% OF SURFACE OPENING: 4.8%
INFILTRATION RATE: 570 in./hr (14 475 mm/hr)

*For this application, it is recommended that this product be installed on a concrete base as designed by a local Engineer.

**HD² Slate is only available in USA.